

OSW & OSWG Selector Switches




- For Use With Thermocouples and RTD's
- 3 and 5 Inch Sizes in 2 and 3 Pole Configurations
- Gold or Silver Plated Contacts
- 2 to 40 Positions
- Wire Connecting Screws Included
- Also Available in 1/4 DIN
- Monogram Series with Gold Plated Contacts
- Pistol Grip Handles Also Available

Specifications and Ordering Information

No. Poles	No. Positions	Contact Action	Size (In.)	Contacts	
				Silver Plated	Gold Plated
2 POLE	2	Break Before Make	3	OSW3-2/C	OSWG3-2/C
	3			OSW3-3/C	OSWG3-3/C
	4			OSW3-4/C	OSWG3-4/C
	5			OSW3-5/C	OSWG3-5/C
	6			OSW3-6/C	OSWG3-6/C
	8			OSW3-8/C	OSWG3-8/C
	9	OSW3-9/C	OSWG3-9/C		
	10	Make Before Break	3	OSW3-10/C	OSWG3-10/C
	12			OSW3-12/C	OSWG3-12/C
	14			OSW3-14/C	OSWG3-14/C
	16			OSW3-16/C	OSWG3-16/C
	18			OSW3-18/C	OSWG3-18/C
	20			OSW3-20/C	OSWG3-20/C
	24			OSW5-24/C	OSWG5-24/C
	28			OSW5-28/C	OSWG5-28/C
	30			OSW5-30/C	OSWG5-30/C
32	OSW5-32/C			OSWG5-32/C	
36	OSW5-36/C	OSWG5-36/C			
40	OSW5-40/C	OSWG5-40/C			
3 POLE	6	Make Before Break	5	OSWT-6/C	OSWGT-6/C
	10			OSWT-10/C	OSWGT-10/C
	12			OSWT-12/C	OSWGT-12/C
	18			OSWT-18/C	OSWGT-18/C
	20			OSWT-20/C	OSWGT-20/C
	24			OSWT-24/C	OSWGT-24/C
	28			OSWT-28/C	OSWGT-28/C
	30			OSWT-30/C	OSWGT-30/C
	32			OSWT-32/C	OSWGT-32/C
	36			OSWT-36/C	OSWGT-36/C
40	OSWT-40/C	OSWGT-40/C			

3-Pole

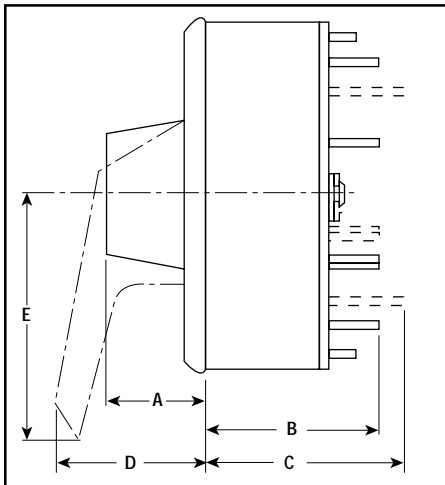

In Stock:

Model	PCN
OSW3-12/C	308232
OSWT-12/C	308247

OSW Switch — Dimensions

Switch Size	Dimensions (In.) "mm"					Bezel Size (In.) "mm"
	A	B	C	D	E	
"76" (3)	"28.6" (1-1/8)	"54" (2-1/8)	"62" (2-7/16)	"44.4" (1-3/4)	"66.7" (2-5/8)	"82.55" (3-1/4)
"127" (5)	"38.1" (1-1/2)	"54" (2-1/8)	"62" (2-7/16)	"58.7" (2-5/16)	"92.07" (3-5/8)	"133.35" (5-1/4)