




## UHP

### Utility Handle Probe Molded Thermocouple

- Molded Handle Rated to 425°F (218°C)
- Retractable Cable with Superior Memory Expands to 5 Feet
- Subminiature Connector for Use with Handheld Thermometers
- 12, 18 and 24" Lengths Standard; Custom Lengths Available
- Available with PFA Teflon® Coating
- Thermocouple Probe Permanently Mounted to Handle Assembly with Subminiature Connector



#### Dimensions (Inches)

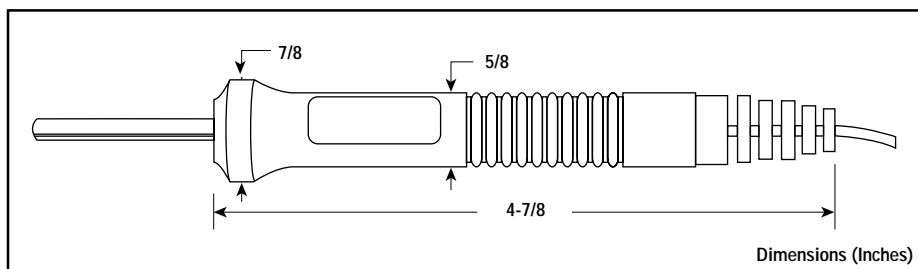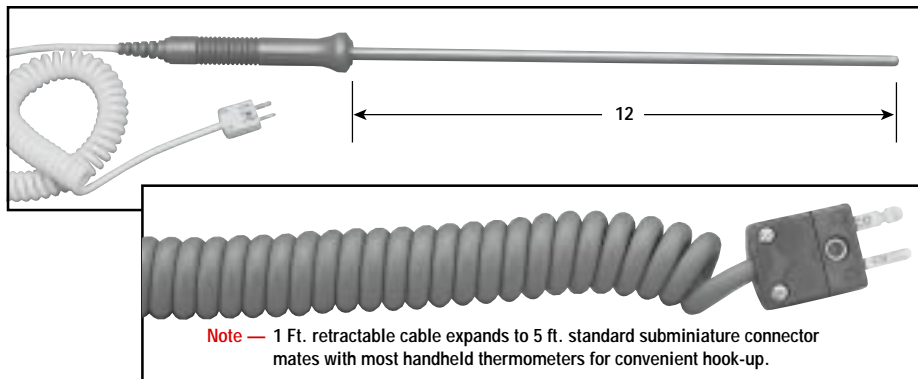

#### Specifications and Ordering Information

Thermocouple Alloy		Sheath Dia. (In.)	Model 12" Length
Iron-Constantan INCONEL® Sheath	J	1/16	JHIN-116 <sup>(1)</sup> -RSC-12/C
	J	1/8	JHIN-18 <sup>(1)</sup> -RSC-12/C
	J	3/16	JHSS-316 <sup>(1)</sup> -RSC-12/C
	J	1/4	JHIN-14 <sup>(1)</sup> -RSC-12/C
Iron-Constantan 304 SS Sheath	J	1/16	JHSS-116 <sup>(1)</sup> -RSC-12/C
	J	1/8	JHSS-18 <sup>(1)</sup> -RSC-12/C
	J	3/16	JHSS-316 <sup>(1)</sup> -RSC-12/C
	J	1/4	JHSS-14 <sup>(1)</sup> -RSC-12/C
Chromel-Alumel INCONEL® Sheath	K	1/16	KHIN-116 <sup>(1)</sup> -RSC-12/C
	K	1/8	KHIN-18 <sup>(1)</sup> -RSC-12/C
	K	3/16	KHIN-316 <sup>(1)</sup> -RSC-12/C
	K	1/4	KHIN-14 <sup>(1)</sup> -RSC-12/C
Chromel-Alumel 304 SS Sheath	K	1/16	KHSS-116 <sup>(1)</sup> -RSC-12/C
	K	1/8	KHSS-18 <sup>(1)</sup> -RSC-12/C
	K	3/16	KHSS-316 <sup>(1)</sup> -RSC-12/C
	K	1/4	KHSS-14 <sup>(1)</sup> -RSC-12/C
Chromel-Constantan INCONEL® Sheath	E	1/16	EHIN-116 <sup>(1)</sup> -RSC-12/C
	E	1/8	EHIN-18 <sup>(1)</sup> -RSC-12/C
	E	3/16	EHIN-316 <sup>(1)</sup> -RSC-12/C
	E	1/4	EHIN-14 <sup>(1)</sup> -RSC-12/C
Chromel-Constantan 304 SS Sheath	E	1/16	EHSS-116 <sup>(1)</sup> -RSC-12/C
	E	1/8	EHSS-18 <sup>(1)</sup> -RSC-12/C
	E	3/16	EHSS-316 <sup>(1)</sup> -RSC-12/C
	E	1/4	EHSS-14 <sup>(1)</sup> -RSC-12/C
Copper-Constantan INCONEL® Sheath	T	1/16	THIN-116 <sup>(1)</sup> -RSC-12/C
	T	1/8	THIN-18 <sup>(1)</sup> -RSC-12/C
	T	3/16	THIN-316 <sup>(1)</sup> -RSC-12/C
	T	1/4	THIN-14 <sup>(1)</sup> -RSC-12/C
Copper-Constantan 304 SS Sheath	T	1/16	THSS-116 <sup>(1)</sup> -RSC-12/C
	T	1/8	THSS-18 <sup>(1)</sup> -RSC-12/C
	T	3/16	THSS-316 <sup>(1)</sup> -RSC-12/C
	T	1/4	THSS-14 <sup>(1)</sup> -RSC-12/C

1. Specify junction type: G (Grounded), E (Exposed) or U (Ungrounded).

Teflon® is a registered trademark of DuPont.