


WIRE

Thermocouple Grade Thermocouple Wire

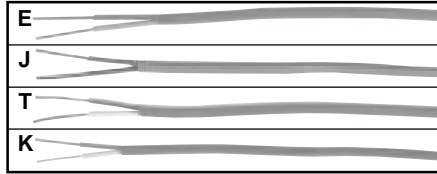

- Available in 25, 50, 100, 200, 500 and 1000 Ft. Lengths
- HH High Temperature Glass Rated to 1300°F (704°C)
- GG Glass Braid Rated to 900°F (482°C)
- TG Teflon®/Neoflon Glass Rated Up to 500°F (260°C)
- TT PFA Teflon® Insulation Rated to 500°F (260°C)
- FF FEP Teflon® Insulation Rated to 392°F (200°C)

In Stock:

Model	PCN
GG-J-20-25/C	327505
GG-J-20-50/C	308988
GG-J-20-100/C	327513
GG-J-20-200/C	308996
GG-J-20-500/C	327521
GG-J-20-1000/C	309008
GG-K-20-25/C	327599
GG-K-20-50/C	309016
GG-K-20-100/C	327601
GG-K-20-200/C	309024
GG-K-20-500/C	327610
GG-K-20-1000/C	309032
GG-K-24-25/C	327628
GG-K-24-100/C	327636
GG-K-24-500/C	327644
FF-J-20-50/C	309040
FF-J-20-200/C	309059
FF-J-20-1000/C	309067
FF-K-20-50/C	309075
FF-K-20-200/C	309083
FF-K-20-1000/C	309091
TT-J-20-25/C	327530
TT-J-20-100/C	327548
TT-J-20-500/C	327556
TT-J-24-25/C	327564
TT-J-24-100/C	327572
TT-J-24-500/C	327580
TT-K-20-25/C	327652
TT-K-20-100/C	327660
TT-K-20-500/C	327679
TT-K-24-25/C	327687
TT-K-24-100/C	327695
TT-K-24-500/C	327708

Ordering Information —

Chromel-Constantan, ANSI Type E

Insulation	AWG No.	Model	Max. Temp°F
High Temp. Glass	20	HH-E-20-([†])/C	1,000
	24	HH-E-24-([†])/C	800
Glass	20	GG-E-20-([†])/C	900
	20	GG-E-20S-([†])/C†	900
	24	GG-E-24-([†])/C	800
	24	GG-E-24S-([†])/C†	800
	26	GG-E-26-([†])/C	800
	30	GG-E-30-([†])/C	700
	36	GG-E-36-([†])/C	700
Teflon®/Neoflon	20	TT-E-20-([†])/C	508
	20	TT-E-20S-([†])/C†	508
	22	TT-E-22S-([†])/C†	508
	24	TT-E-24-([†])/C	508
	24	TT-E-24S-([†])/C†	508
	30	TT-E-30-([†])/C	508
Teflon®/Neoflon FEP	20	FF-E-20-([†])/C	392
	24	FF-E-24-([†])/C	392

1. Specify spool length in feet.
† Stranded Wire

Iron-Constantan, ANSI Type J

Insulation	AWG No.	Model	Max. Temp°F
High Temp. Glass	20	HH-J-20-([†])/C	900
	24	HH-J-24-([†])/C	700
Glass	14	GG-J-14-([†])/C	900
	20	GG-J-20-([†])/C	900
	20	GG-J-20S-([†])/C†	900
	24	GG-J-24-([†])/C	700
	24	GG-J-24S-([†])/C†	700
	28	GG-J-28-([†])/C	700
	30	GG-J-30-([†])/C	600
	36	GG-J-36-([†])/C	600
Teflon®/Neoflon-Glass	30	TG-J-30-([†])/C	500
	36	TG-J-36-([†])/C	500
	40	TG-J-40-([†])/C	500
Teflon®/Neoflon PFA (High Perform.)	20	TT-J-20-([†])/C	500
	20	TT-J-20S-([†])/C†	500
	22	TT-J-22S-([†])/C†	500
	24	TT-J-24-([†])/C	500
	24	TT-J-24S-([†])/C†	500
	30	TT-J-30-([†])/C	500
	36	TT-J-36-([†])/C	500
	40	TT-J-40-([†])/C	500
Teflon®/Neoflon FEP	20	FF-J-20-([†])/C	392
	24	FF-J-24-([†])/C	392
Polyvinyl	24	PR-J-24-([†])/C	221

1. Specify spool length in feet.
† Stranded Wire

Copper-Constantan, ANSI Type T

Insulation	AWG No.	Model	Max Temp°F
Glass	20	GG-T-20-([†])/C	500
	20	GG-T-20S-([†])/C†	500
	24	GG-T-24-([†])/C	400
	24	GG-T-24S-([†])/C†	400
	28	GG-T-28-([†])/C	400
	30	GG-T-30-([†])/C	300
Teflon®/Neoflon-Glass	30	TG-T-30-([†])/C	500
	36	TG-T-36-([†])/C	500
	40	TG-T-40-([†])/C	500
Teflon®/Neoflon PFA (High Perform.)	20	TT-T-20-([†])/C	500
	20	TT-T-20S-([†])/C†	500
	22	TT-T-22S-([†])/C†	500
	24	TT-T-24-([†])/C	400
	24	TT-T-24S-([†])/C†	400
	30	TT-T-30-([†])/C	300
Teflon®/Neoflon FEP	20	FF-T-20-([†])/C	392
	24	FF-T-24-([†])/C	392
Polyvinyl	24	PP-T-24-([†])/C	221
	24	PP-T-24S-([†])/C†	221
	24	PR-T-24-([†])/C	221

1. Specify spool length in feet.
† Stranded Wire

Teflon® is a registered trademark of DuPont.

Chromel-Alumel, ANSI Type K

Insulation	AWG No.	Model	Max Temp°F
High Temp. Glass	20	HH-K-20-([†])/C	1,300
	24	HH-K-24-([†])/C	1,300
Glass	20	GG-K-20-([†])/C	900
	20	GG-K-20S-([†])/C†	900
	24	GG-K-24-([†])/C	900
	24	GG-K-24S-([†])/C†	900
	26	GG-K-26-([†])/C	900
	28	GG-K-28-([†])/C	900
	30	GG-K-30-([†])/C	900
Teflon®/Neoflon-Glass	36	GG-K-36-([†])/C	900
	30	TG-K-30-([†])/C	500
	36	TG-K-36-([†])/C	500
	40	TG-K-40-([†])/C	500
Teflon®/Neoflon PFA (High Perform.)	20	TT-K-20-([†])/C	500
	20	TT-K-20S-([†])/C†	500
	22	TT-K-22S-([†])/C†	500
	24	TT-K-24-([†])/C	500
	24	TT-K-24S-([†])/C†	500
	30	TT-K-30-([†])/C	500
	36	TT-K-36-([†])/C	500
Teflon®/Neoflon FEP	20	FF-K-20-([†])/C	392
	24	FF-K-24-([†])/C	392
Polyvinyl Kapton®	24	PR-K-24-([†])/C	221
	20	KK-K-20-([†])/C	600
	24	KK-K-24-([†])/C	600

1. Specify spool length in feet.
† Stranded Wire