



XCIB

High-Temp. Overbraided Thermocouples


- Withstands Temperatures Up to 2000°F (1093°C)
- High Temperature Ceramic Insulation with INCONEL® Overbraid
- Standard Lengths are 3 and 10 Feet. Additional Lengths Available
- J, K or E Thermocouple Calibrations
- Grounded Junction

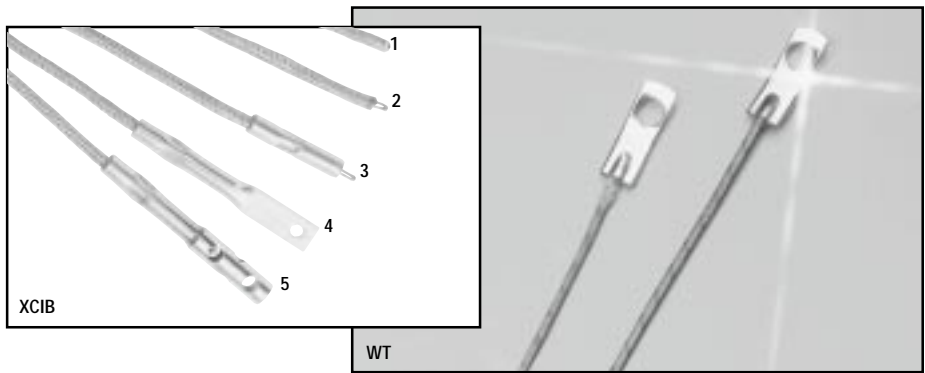


Termination Types



1. Ceramic beaded leads with compensated spade lugs.



2. OST standard thermocouple connector (to 425°F)



3. NHXH ceramic connector (to 1200°F)

Specifications and Ordering Information — XCIB

Model	Probe Style	Termination Type	Model	Probe Style	Termination Type
XCIB-(⁻)-1-1-(⁻)/C	1	1	XCIB-(⁻)-3-3-(⁻)/C	3	3
XCIB-(⁻)-1-2-(⁻)/C		2	XCIB-(⁻)-3-4-(⁻)/C		1
XCIB-(⁻)-1-3-(⁻)/C		3	XCIB-(⁻)-4-1-(⁻)/C		1
XCIB-(⁻)-1-4-(⁻)/C	2	4	XCIB-(⁻)-4-2-(⁻)/C	4	2
XCIB-(⁻)-2-1-(⁻)/C		1	XCIB-(⁻)-4-3-(⁻)/C		3
XCIB-(⁻)-2-2-(⁻)/C		2	XCIB-(⁻)-4-4-(⁻)/C		4
XCIB-(⁻)-2-3-(⁻)/C		3	XCIB-(⁻)-5-1-(⁻)/C		1
XCIB-(⁻)-2-4-(⁻)/C	3	4	XCIB-(⁻)-5-2-(⁻)/C	5	2
XCIB-(⁻)-3-1-(⁻)/C		1	XCIB-(⁻)-5-3-(⁻)/C		3
XCIB-(⁻)-3-2-(⁻)/C		2	XCIB-(⁻)-5-4-(⁻)/C		4

Note — 1. Specify thermocouple type: J: Iron-Constantan, K: Chromel-Alumel, E: Chromel-Constantan
2. Specify length in feet (3 or 10 Ft. standard)

WT Series

Bolt-On Washer Type Thermocouples

- Grounded Junction
- Rated to 900°F (482°C)
- For #6, #8, #10 and 1/4" Screw Sizes
- Standard Lengths are 12, 24, 36 and 60"
- J, K, T or E Thermocouple Calibrations
- Made From 20 AWG Glass on Glass Insulated Wire

Specifications and Ordering Information — WT

Model				Washer Nominal Hole	Screw Size	
12" Length	24" Length	36" Length	60" Length		American	Metric
WT-(⁻)-6-12/C	WT-(⁻)-6-24/C	WT-(⁻)-6-36/C	WT-(⁻)-6-60/C	0.145	#6	M3.5
WT-(⁻)-8-12/C	WT-(⁻)-8-24/C	WT-(⁻)-8-36/C	WT-(⁻)-8-60/C	0.170	#8	M4
WT-(⁻)-10-12/C	WT-(⁻)-10-24/C	WT-(⁻)-10-36/C	WT-(⁻)-10-60/C	0.195	#10	M4.5
WT-(⁻)-14-12/C	WT-(⁻)-14-24/C	WT-(⁻)-14-36/C	WT-(⁻)-14-60/C	0.260	#1/4	M6

1. Specify calibration: J, K, T or E. Stripped leads are standard. To order other terminations, add suffix "L" for #10 spade lugs, "M" for OST male connector, or add "F" for OST female connector. To order lead lengths over 60", change "60" in model number to desired length. To order with Teflon® insulated lead wires, add suffix "-TT" to end of model number.

Teflon® is a registered trademark of DuPont.

In Stock:

Model	PCN
XCIB-K-1-2-3/C	326810
XCIB-K-1-2-10/C	326828
XCIB-K-1-3-10/C	326836
XCIB-K-1-4-3/C	326844
XCIB-K-1-4-10/C	326852
XCIB-K-2-2-3/C	326860
XCIB-K-2-2-10/C	326879
XCIB-K-4-2-10/C	326887
XCIB-K-4-4-3/C	326895
XCIB-J-4-4-3/C	326908
XCIB-K-4-4-10/C	326916
XCIB-J-4-4-10/C	326924

In Stock:

Model	PCN
WTJ-8-24/C	326932
WTK-8-24/C	326940
WTJ-10-24/C	326959
WTK-10-24/C	326967
WTJ-10-60/C	326975
WTK-10-60/C	326983