

ChromaStar™

Accessories (cont'd.)

Plug Kits for Portable Heaters

Plug Type	Catalog Number	Description	Volts	Amps	Config.	NEMA#	ANSI#	Fits Cable Dia.	Stock	PCN	Wt. (Lbs.)
Locking	PGL-15-20	3 Pole 4 Wire	250	20		L15-20	C73.85	.385"- .780	ST	338845	0.5
Locking	PGL-15-30	3 Pole 4 Wire	250	30		L15-30	C73.86	.385"- .780	ST	338853	0.5
Locking	PGL-16-30	3 Pole 4 Wire	480	30		L16-30	C73.88	.595"- 1.150	ST	338861	0.5
Locking	PGL-17-30	3 Pole 4 Wire	600	30		L17-30	C73.89	.595"- 1.150	ST	338870	0.5
Locking	PGL-3763C	2 Pole 3 Wire	600	50		-	-	.750"-1.125	ST	338917	0.5
Locking	PGL-3764C	3 Pole 3 Wire	600	50		-	-	.750"-1.125	ST	338925	0.5
Non Locking	PGN-6-50	2 Pole 3 Wire	250	50		6-50	C73.53	.625"-1.187	ST	338888	0.5
Non Locking	PGN-15-20	3 Pole 4 Wire	250	20		15-20	C73.59	.390"- .775	ST	338896	0.5
Non Locking	PGN-15-50	3 Pole 4 Wire	250	50		15-50	C73.61	.750"-1.250	ST	338909	0.5

Cable Kits for ChromaStar™ Series Portable Radiant Heaters


Cable packages include 25 feet Type SO cable, with either 3-conductors or 4-conductors, depending on the heater requirements. Each cable assembly includes the proper cord (connector). Plugs are not included. All models are factory wired for 3-phase, but can be field wired for single phase, select plug and cord accordingly.

Catalog No.	Size/Type	Cable Specifications		Cord Connector NPT	Stock	PCN	Wt. (Lbs.)
		Max. Amp	Temperature Ratings				
PLC-2514-4	14/4SO	15	90 Deg. C	3/4"	ST	295427	7
PLC-2514-3	14/3SO	18	90 Deg. C	3/4"	ST	295670	23
PLC-2512-4	12/4SO	20	90 Deg. C	1"	ST	295435	9
PLC-2512-3	12/3SO	25	90 Deg. C	3/4"	ST	295662	6
PLC-2510-3	10/3SO	30	90 Deg. C	1"	ST	295443	9
PLC-2508-3	8/4SO	35	90 Deg. C	1"	ST	295460	15
PLC-2506-4	6/4SO	45	90 Deg. C	1"	ST	295494	17
PLC-2506-3	6/3SO	55	90 Deg. C	1"	ST	295486	16

SO = hard Service Cord, 600V Length = 25 Feet

Replacement Elements

Cat. No.	kW	Volts	Win2	Dimensions - inches		Status	PCN	Wt. Lbs.
				A	B			
UTU-STAR 21	1.5	120	32	21-1/2	20-1/2	AS	106059	2
UTU-STAR 28	2	208	42	21-1/2	20-1/2	AS	106067	3
UTU-STAR 22	2	240	42	21-1/2	20-1/2	AS	106075	3
UTU-STAR 27	2	277	42	21-1/2	20-1/2	AS	106083	3
UTU-STAR 24	2	480	42	21-1/2	20-1/2	AS	106091	3
UTU-STAR 26	2	600	42	21-1/2	20-1/2	AS	106104	3
UTU-STAR 48	4.5	208	42	43-3/8	42-3/8	AS	106403	4
UTU-STAR 42	4.5	240	42	43-3/8	42-3/8	AS	106411	4
UTU-STAR 47	4.5	277	42	43-3/8	42-3/8	AS	106796	4
UTU-STAR 44	4.5	480	42	43-3/8	42-3/8	AS	106964	4
UTU-STAR 46	4.5	600	42	43-3/8	42-3/8	AS	106972	4

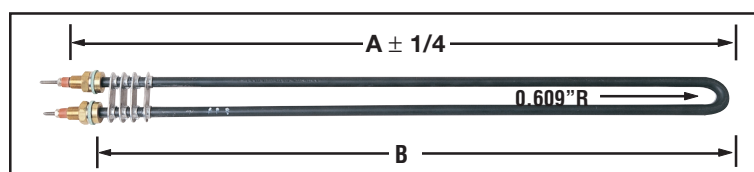

UTU-STAR