

## DL

### Integrated Connection Accessories



- **Power Connection Box**
  - NEMA 4X Enclosure
  - Cable Entry Up to 3 Cables
  - 3/4" Conduit Hub Opening
- **Splice & Tee Box**
  - NEMA 4X Enclosure
  - Cable Entry Up to 3 Cables
  - Straight or Tee Connections
- **End Seal Fitting**
  - NEMA 4X Enclosure
  - Fits All Pipe Sizes
  - Feet for Installing on Flat Surfaces
- **Stainless Steel Hardware**
- **Corrosion & Weather Resistant Ryton® Construction**


#### ***RTPC***



#### ***RTST***



#### ***RTES***



#### ***Description***

The DL Series Installation Accessories for Chromalox heat tracing products represents the state of the art in heat tracing. Each model in the series is designed to satisfy the demands of a particular operation. These high-quality models combine a variety of functions in a convenient, easy to use and economical package.

#### ***Applications***

Connection of all Rapid Trace Heating Cables to Customer Supplied Power Wiring in any of the following applications:

- Hydrocarbon and Chemical Product Piping
- Process Temperature Maintenance
- Fluid Flow and Viscosity Maintenance
- Freeze Protection.

#### ***Features***

- Molded of Durable Plastic Material (Ryton®, PPS)<sup>1</sup>
- High Service Temperature
- Corrosion Resistant
- Integrated Connection Accessories and Controls

- Thermal Stability
- Non-Flammable
- High Strength and Rigidity
- Stainless Steel Hardware to Ensure the Integrity of the System
- Liquid Tight Design prevents moisture from reaching the electrical connections. All models are rated NEMA 4X.

#### ***Approvals<sup>2</sup>***

UL, CSA, FM Approved for most models, consult specific product information.

UL Listed for ordinary areas

CSA Certified for ordinary and:

- Class I, Div. 2, Groups A, B, C, D
- Class II, Div. 2, Groups F, G.

FM Approved for ordinary and:

- Class I, Div. 2, Groups B, C, D
- Class II, Div. 2, Groups F, G
- Class III, Div. 2 Areas.

#### ***Notes —***



1. Ryton®, is a registered trade name of Phillips Chemical Company.
2. Depends on specific model and cable applied.

## DL

### Integrated Connection Accessories *(cont'd.)*

#### **RTPC — Power Connection Kit**

RTPC Power Connection Box is a NEMA 4X rated junction box designed to connect all Chromalox Rapid Trace Heating Cables to customer supplied power wiring. This kit provides waterproof cable entry for up to three cables, enclosure support, terminal block and a waterproof, corrosion resistant wiring enclosure with a 3/4" opening to accept a conduit hub (Chromalox CCH-2 or equal). A pipe strap (Chromalox PS or equal) is required to attach this model to a pipe.

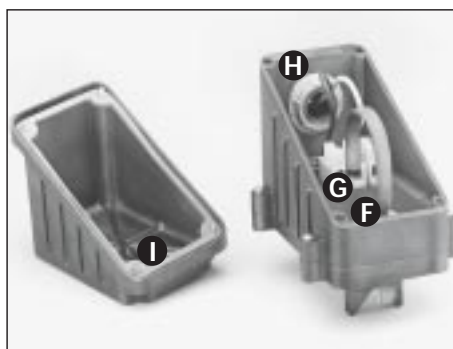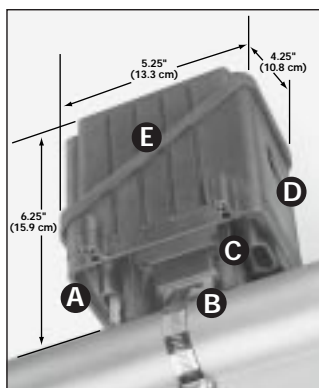

#### **Construction**

- A** Three strategically placed cable entries allow maximum flexibility for insulation (Heating cable cut away for clarity).
- B** Stainless steel tiedown support provides positive attachment to pipes.<sup>1</sup>
- C** Heavy duty support legs give stable pipe mounting and provide conduit clearance for applications with up to three inches of insulation.
- D** Opening for 3/4" (20 mm) conduit hub.<sup>1</sup>
- E** Oblique sided box and cover allow easy access for wiring.
- F** Cable grommets provide water-tight seal between base, box and cable.<sup>1</sup>
- G** Three position terminal block for easy wiring.
- H** Power wiring entry. Conduit hub not included.<sup>1</sup>
- I** Gasket provides water-tight seal between box and lid. It is affixed to the lid and holds the mounting hardware during assembly.

**Note 1** — Refer to DL & EL General Application Accessories at the end of this section.

#### **RTPC — Power Connection Kit**

- 1 molded junction box consisting of:
  - 1 base
  - 1 box w/conduit opening
  - 1 lid
- 1 three position terminal block
- 1 mounting screw for terminal block

**Note** — Order cable grommet separately.

#### **RTPC-SL — Power Connection Kit w/Signal Light**

- 1 molded junction box consisting of:
  - 1 base
  - 1 box w/conduit opening
  - 1 lid w/signal light installed
- 1 three position terminal block
- 1 mounting screw for terminal block

**Note** — Order cable grommet separately.

#### **Ordering Information — RTPC**

Model	PCN	Stock	Wt. (Lbs.)
RTPC	384796	S	1
RTPC-SL	385668	S	2

#### **GRS - GR8**



#### **Grommets**

GRS	RTD/Capillary type	PCN
GR0	Blank	385019
GR1	SRL-C	385027
GR2	SRL-CR, CT	385035
GR3	CWM-C	385043
GR4	CWM-CT	385051
GR5	SRL-MC	385060
GR6	SRL-MCR, MCT	385078
GR7	SRM/E-C	385086
GR8	SRM/E-CT	385094



The appropriate grommet must be ordered separately to provide a water tight seal to the accessory. Select the appropriate grommet from table and order 1 grommet for every cable which must enter the accessory.

## DL

### Integrated Connection Accessories *(cont'd.)*

#### **RTST — Splice & Tee Kit**

RTST Splice & Tee Box is a NEMA 4X rated junction box designed to make straight or tee splices for all Chromalox Rapid Trace Heating Cables. This model provides waterproof cable entry (for two cables for a splice or three cables for a tee), enclosure support, terminal block and a waterproof, corrosion resistant wiring enclosure. A pipe strap (Chromalox PS or equal) is required to attach this model to a pipe.

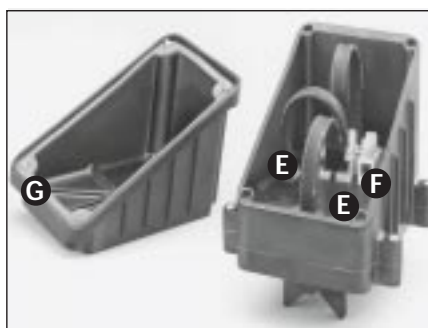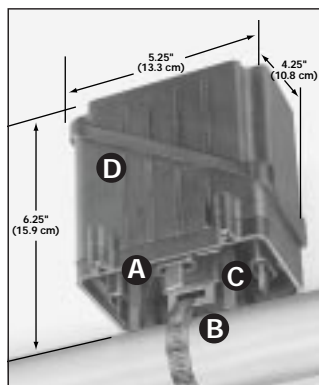

#### **RTST — Splice & Tee Kit**

1 molded junction box consisting of:

- 1 base
- 1 box
- 1 lid
- 1 three position terminal block
- 1 mounting screw for terminal block

**Note** — Order cable grommet separately.

#### **Ordering Information — RTST**

Model	PCN	Stock	Wt. (Lbs.)
RTST	384809	S	1
RTST-SL	385895	S	2

#### **GRS - GR8**



#### **Grommets**

Grommets	PCN
GRS RTD/Capillary type	383000
GR0 Blank	385019
GR1 SRL-C	385027
GR2 SRL-CR, CT	385035
GR3 CWM-C	385043
GR4 CWM-CT	385051
GR5 SRL-MC	385060
GR6 SRL-MCR, MCT	385078
GR7 SRM/E-C	385086
GR8 SRM/E-CT	385094

The appropriate grommet must be ordered separately to provide a water tight seal to the accessory. Select the appropriate grommet from table and order 1 grommet for every cable which must enter the accessory.

#### **Construction**

- A** Three strategically placed cable entries allow maximum flexibility for insulation (Heating cable cut away for clarity).
- B** Stainless steel tiedown support provides positive attachment to pipes.<sup>1</sup>
- C** Heavy duty support legs give stable pipe mounting and provide conduit clearance for applications with up to three inches of insulation.
- D** Oblique sided box and cover allow easy access for wiring.
- E** Cable grommets provide water-tight seal between base and box.<sup>1</sup>
- F** Three position terminal block for easy wiring.
- G** Gasket provides water-tight seal between box and lid. It is affixed to the lid and holds the mounting hardware during assembly.

**Note 1** — Refer to DL & EL General Application Accessories at the end of this section.

#### **RTST-SL — Splice & Tee Kit w/Signal Light**

1 molded junction box consisting of:

- 1 base
- 1 box
- 1 lid w/signal light installed
- 1 three position terminal block
- 1 mounting screw for terminal block



**Note** — Order cable grommet separately.

## DL

### Integrated Connection Accessories *(cont'd.)*

#### **RTES — End Seal Kit**

RTES End Seal Fitting is a NEMA 4X rated enclosure designed to terminate all Chromalox Rapid Trace Heating Cables. This model provides waterproof cable entry for one cable, enclosure support and a water-proof corrosion resistant enclosure. The fitting has two different curved mounting surfaces. One side has a 1-1/2" radius curved surface that provides stable support on pipes with a diameter of 3" or more. The other side has a 1/2" radius curved surface which permits a better fit on smaller pipes. In addition, this side also has four "feet" for installation on flat surfaces.

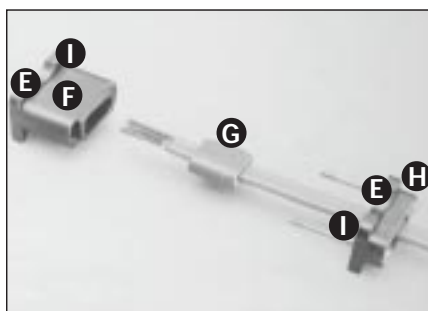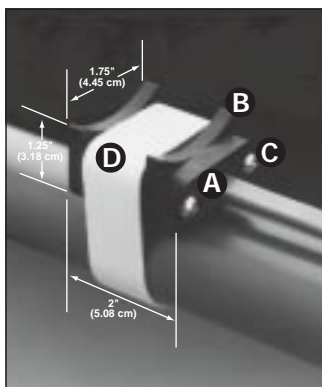

#### **RTES — End Seal Kit**

1 end cap  
1 pressure plate

**Note** — Order cable grommet separately.

#### **Construction**

- A** Cable entry.
- B** Three inch diameter curved mounting surface.
- C** Captured stainless steel hardware.
- D** One inch wide strapping channel for secure mounting.
- E** One-half inch radius curved mounting surface.
- F** End cap.
- G** Cable grommet provides water-tight seal between end cap and pressure plate.
- H** Pressure plate.
- I** Mounting feet for installation on flat surfaces.

#### **Ordering Information — RTES**

Model	PCN	Stock	Wt. (Lbs.)
<b>RTES</b>	<b>384817</b>	<b>S</b>	<b>1</b>

#### **DL Accessory Components**

##### **MP-1 (385780)**



##### **Mounting Plate Kit Attachments**

For installing RTPC and RTST kits on flat surfaces. Kit includes:  
1 mounting plate  
1 lock washer  
1 bolt  
1 washer  
1 nut

**Note** — The complete line of DL & EL Mounting Accessories is located at the end of this section.

##### **GRS - GR8**



##### **Grommets**

##### **PCN**

GRS	RTD/Capillary type	383000
GR0	Blank	385019
GR1	SRL-C	385027
GR2	SRL-CR, CT	385035
GR3	CWM-C	385043
GR4	CWM-CT	385051
GR5	SRL-MC	385060
GR6	SRL-MCR, MCT	385078
GR7	SRM/E-C	385086
GR8	SRM/E-CT	385094

The appropriate grommet must be ordered separately to provide a water tight seal to the accessory. Select the appropriate grommet from table and order 1 grommet for every cable which must enter the accessory.